

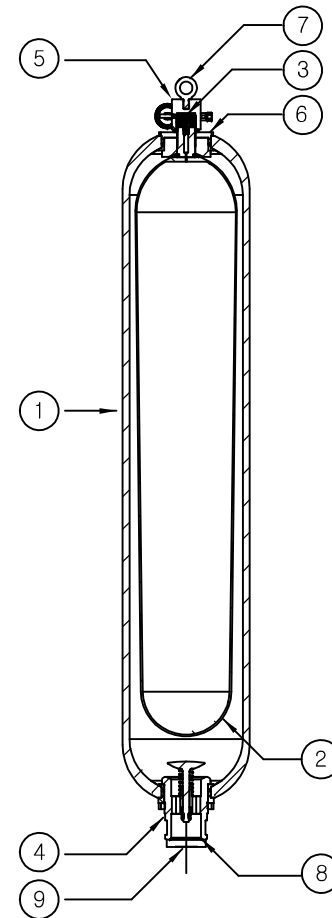


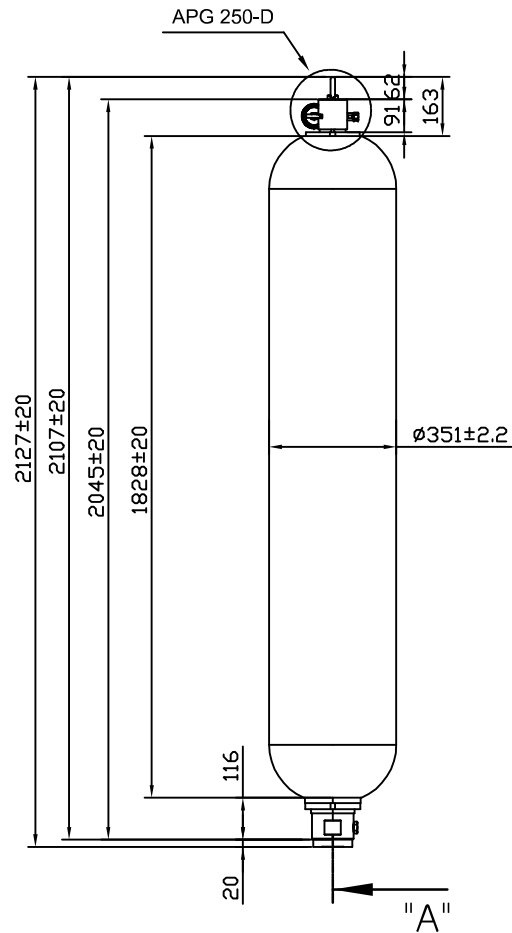

SECTION "A-A"

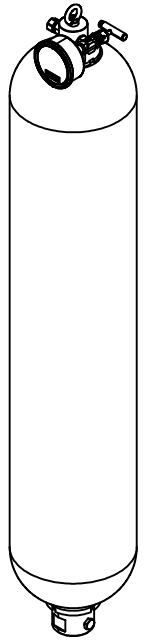

[NOTE]

1. Design Pressure : 315bar
2. Operation Temperature : -20°C ~ +80°C
3. Hydraulic Test Pressure : Min. 395bar
4. Filling Fluid : Hydraulic Oil
5. Paint Color No. : RAL 9005 (Black)
6. Surface Coating : Epoxy

SPECIFICATION OF ACCUMULATOR

NO.	DESCRIPTION	SIZE	Q'ty	MATERIAL
1	ACCUMULATOR / 125Lit	125LIT	1	35CRMO
2	BLADDER	for 125Lit	1	NBR
3	GAS VALVE	-	1	SUS303
4	FLUID PLUG	M80x3-6H	1	40CR
5	APG BODY	-	1	S45C
6	NAME PLATE	-	1	Aluminum
7	EYE BOLT	M16	1	STEEL
8	O-RING	85	1	NBR
9	BUSHING	G 1 1/2"	1	S45C

DESIGN				1 OF 1	
TITLE				ISSUE DATE	
ACCUMULATOR					
HBA-125-315-PK					
DESIGN TEAM		PROJECTION METHOD	THIRD ANGLE PROJECTION	SCALE	N / A
DRWN	J.Y.MIN	23.01.15			A3
CHK'D					Q'TY
REV'D					
APP'D					
DWG NO.				D-A-2412-003_KO	
				REV.	